USING A SHINGLEBACK SWING ARM WITH THE SHINGLEBACK DOLLY STAND

If you are using your Shingleback Dolly Stand to store a Shingleback rack with a Shingleback Swing Arm fitted, a small adjustment is required when assembling the Dolly Stand.

1. Adjust the gusset plate position


When completing **Step 2 of the Dolly Stand Assembly Instructions**, instead of fitting one gusset plate to each side of the cross beam; **stack the two gusset plates together and fit them to the top side of the cross beam.**

Then continue assembling the Dolly Stand as outlined in the standard instructions.



2. Fit the Swing Arm

Once the Dolly Stand is fully assembled, insert the Swing Arm into the Dolly Stand hitch receiver.
Secure it in place using the orange handle.

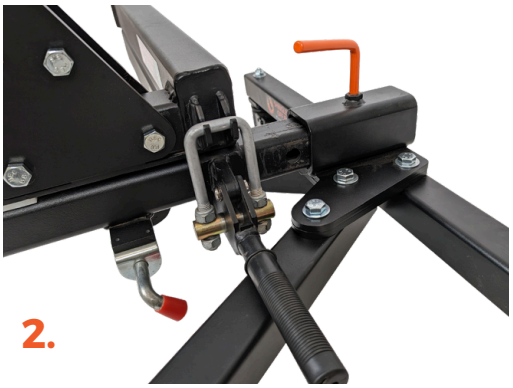

3. Fit your Shingleback rack

Fit your Shingleback bike rack to the Swing Arm as you normally would when mounting it to your vehicle.

Your Shingleback rack and Swing Arm can now be stored together on the Dolly Stand.



SHINGLEBACK® OFF ROAD